


Residential lock sets

Knob/lever design options

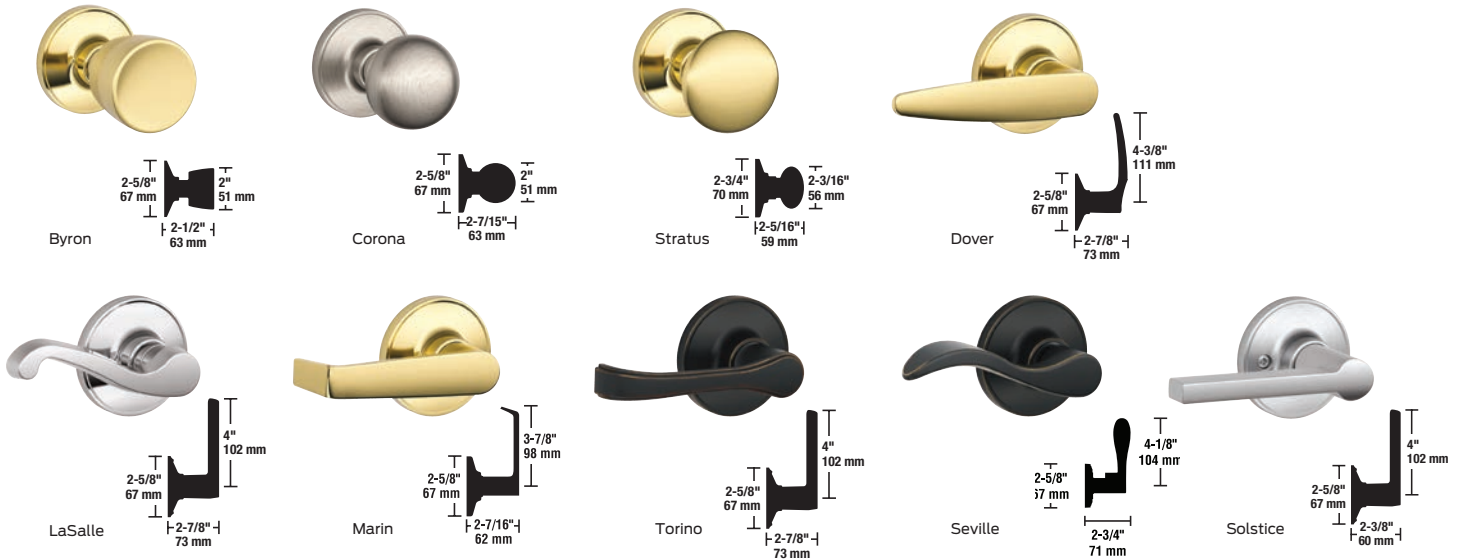

Dover, Marin and Torino lever designs are non-handed. LaSalle and Seville are reversible.

Specifications

Applications	Residential single and multi-family doors.
Certifications	ANSI A156.2, 1996, Series 4000 Grade 3.
Exposed trim	Levers are zinc-based; plated to match finishes indicated. Knobs are brass or stainless steel; plated to match finishes indicated.
Keying	5-pin tumbler Schlage C keyway with two brass keys.
Door range	1 ³ / ₈ " to 1 ³ / ₄ " (35mm to 44mm) standard.
Backset	Universal latch standard, fits either 2 ³ / ₈ " (60mm) or 2 ³ / ₄ " (70mm) backsets.
UL listing	Knobs/levers available with UL listing. Box pack only.

Finishes

Knobs	605	609	619	620	625	626	630	716
Byron	■	■					■	
Corona	■	■	■	■	■		■	■
Stratus	■	■	■		■		■	■
Dover	■	*					■	
LaSalle	■	■	■					■
Marin			■				■	
Torino	■	■	■	*	■		■	■
Seville	■	■	■		■			■
Solstice			■		■	■		■

See page 25 for finish samples

*Discontinued; available while supplies last

Standard features

- Lifetime mechanical warranty, five-year finish warranty
- Schlage C keyways can be keyed to Schlage locks for one-key convenience

Latches and strikes

Latches: 1" x 2 1/4" (25 mm x 57 mm), 1/2" (13 mm) throw standard. Dual option faceplates, including 1 1/8" (29 mm) round corner and circular drive-in, are standard for passage and privacy functions. Keyed functions also come with 1 1/8" (29 mm) square corner faceplates standard, in addition to round corner and circular drive-in. 1 1/8" (29 mm) faceplate adaptors available.

Strikes: Full lip, 1 5/8" x 2 1/4" (41mm x 57mm), 1 1/8" (29mm) lip, #10-026, standard. Optional strikes: full lip, 1/4" (6mm) radius round corner; circular drive-in, ANSI 1 1/4" x 4 7/8" (32mm x 124mm), 1 3/16" (30mm) lip. UL Listed locks are furnished with #10-101 T strike, 1 1/8" x 2 3/4" (29mm x 70mm), 1 1/8" (29mm) lip (also available with standard product).

Door preparation

