

# 25 Series

## Strikes and accessories

### Strikes

#### For rim devices



**264**  
2 7/8" x 1 1/4" x 9/16"  
(H x W x D)  
Panic device only.



**299**  
7 7/8" x 1 1/4" x 13/16"  
(H x W x D)  
Panic device only.



**299F**  
2 7/8" x 1 1/4" x 13/16"  
(H x W x D)



**499F**  
3 5/8" x 1 1/2" x 16/16"  
(H x W x D)



**1439 Blade stop**  
1 3/4" x 1 7/8" x 1/2"  
(H x W x D)  
Panic device only.



**1606**  
2 7/8" x 1 3/8" x 3/8"  
(H x W x D)  
Panic device only.



**1609**  
3 1/4" x 1 1/16" x 3/8"  
(H x W x D)  
Requires coordinator.  
Panic device only.

#### For surface and concealed vertical rod devices



**2130**  
(F)25-V and (F)25-C  
standard bottom strike for  
grouting into concrete or  
masonry floors.



**3788**  
Furnished top  
of (F)25-V.



**4155**  
Optional strike.  
Panic device only.



**4188**  
Top strike for  
(F)25-C.

#### For mortise lock devices



**1279**  
Closed strike used on  
single doors and on fire  
exit hardware doors with  
coordinator.




**F1280**  
Open back strike used on pairs of  
1 3/4" doors without astragal or  
coordinator. Can be used on stock  
hollow metal doors. F1280 "B" label  
(1 1/2 hr.) stainless steel strike  
available.



**1281**  
Open back strike for 1 3/4" doors.  
8" x 1 1/4" face allow use in  
mortise lock cutout of stock  
hollow metal door.

### Accessories



**4215**  
Angle bracket for flush transom applications.  
Does not require elimination of latch retention  
feature. Accepts 3788 strike for 25-V device.

#### Surface vertical extension rods

Extension rods are  
available in 12", 24"  
and 36" lengths in  
all finishes. Both  
ends tapped and  
all-thread included  
as connector.




#### Concealed extension rods

Extension rods are  
available in 12", 24"  
and 36". Both ends  
have pressed-in,  
threaded inserts.



#### Filler Plates

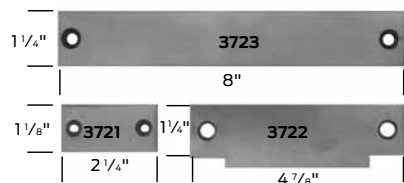

**3721/ 3722/ 3723**  
Steel filler plates

- 3721 Cylindrical lock front filler
- 3722 Strike filler - set no. SC for 161 cutout
- 3723 Mortise lock front filler
- 3722 Strike filler - set no. SM for 86 cutout